

Boy Doll Sweatshirt



Bring a ragdoll to life with this fun and creative sewing project! Use the MOMENTO™ Craft Cutting Machine to cut the sweatshirt for this handsome doll.


What you need

- SINGER® MOMENTO™ Craft Cutting Machine
- Jersey Knit Fabric in Two Contrasting Colors
- Heat Transfer Vinyl
- Fabric Grip Mat 12" x 24"
- Standard Grip Mat 12" x 12"
- Rotary Blade
- Basic Blade
- Brayer
- Sewing Machine


- Stretch/ball point needle
- Thread
- Iron and Ironing Board
- Straight pins
- Hand Sewing Needle
- Buttons
- Parchment Paper

Directions

1. **Prepare the Fabric.** Place the fabric onto the mat. Use a Brayer to adhere the fabric to the mat, smoothing out any wrinkles or bubbles.
2. **Cut the Fabric.** Open the project in canvas. Insert the Rotary Blade into the right carriage of your cutting machine. Select the correct mat size, material type and material size, in the software. Follow the on-screen steps to cut the front and back pieces. Place the second fabric onto the mat and cut the sleeves and neckline.

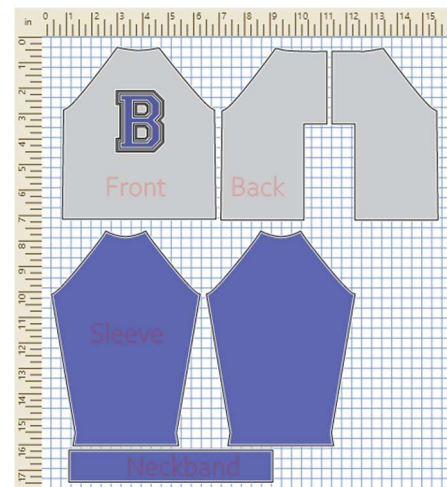


3. **Cut the Vinyl.** Place Heat Transfer Vinyl, shiny side down, on the Standard Grip Mat. Change to the Basic Blade and change the inputs for mat size, material type and material size. Follow the on-screen steps to cut the vinyl design. Weed the design and remove the negative bits.

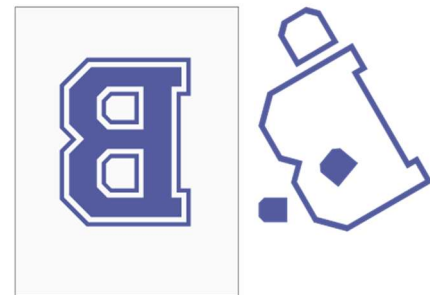


Tips for Sewing in Jersey fabrics:

- Use a stretch or ballpoint needle with a rounded end (rather than a point). This helps push fibers to either side of the needle without creating holes in the fabric.
- Use a stitch like a narrow zig zag or stretch tricot stitch that will stretch with the fabric to prevent the thread from snapping.
- Unlike woven fabrics, knits don't fray, so finishing your seams is optional.


4. **Attach the Sleeves.** With the right sides together, stitch the sleeves to the front and back pieces of the sweatshirt using a $\frac{1}{4}$ " (6mm) seam allowance.

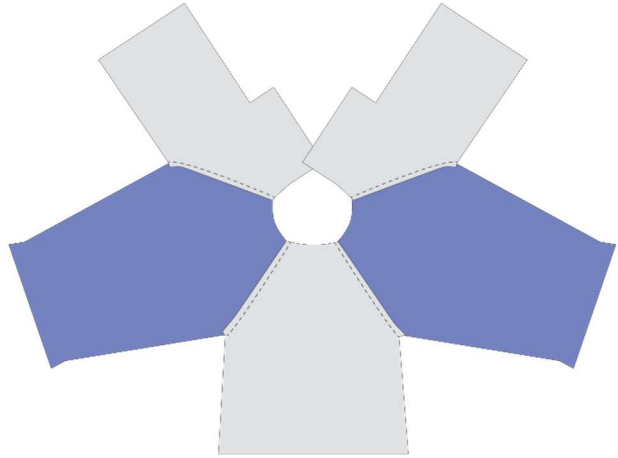


5. **Hem the Sleeves.** Make a single fold to the wrong side and topstitch in place.

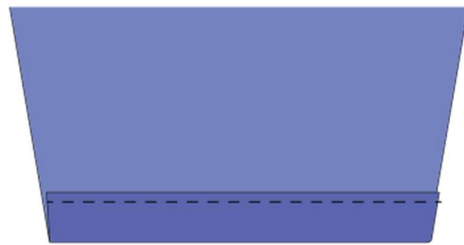


6. **Stitch Front to Back.** With right sides together, stitch underarm and side seams using a $\frac{1}{4}$ " (6mm) seam allowance.

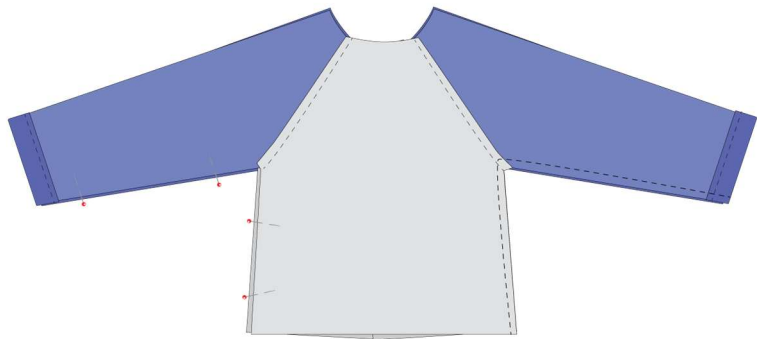

7. **Sew the Neck Band.** Fold the neckband in half lengthwise, wrong sides together and press. Sew the neckband to the neck opening, aligning the raw edges. Stretch the neckband as you sew. Trim excess neckband.

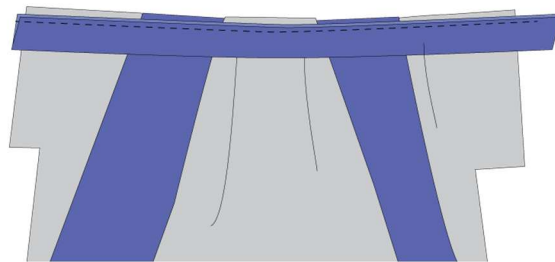

8. **Sew the Back Seam.** Place the back pieces right sides together. Sew the center back seam from the placket to the bottom edge. Fold the placket interfacing to the wrong side. Sew down on both sides.

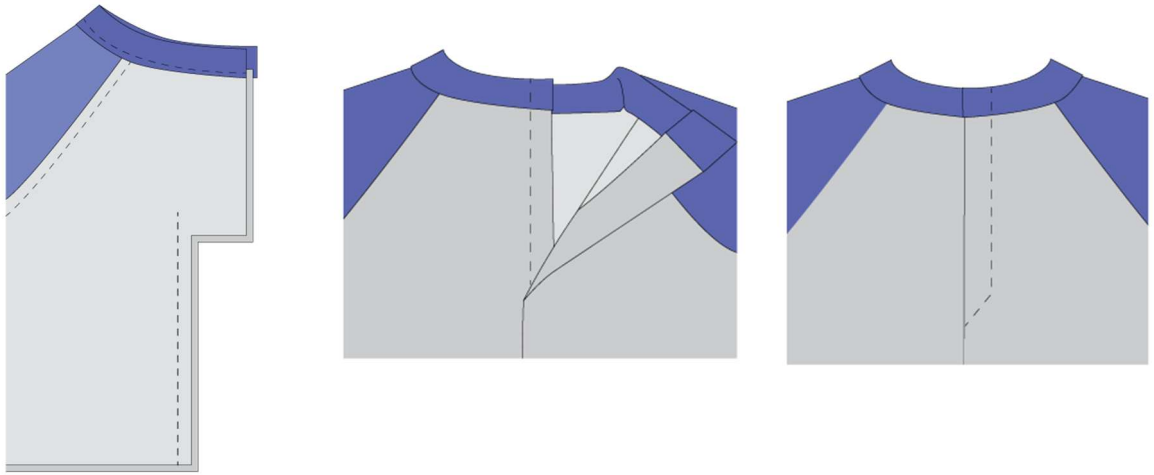

9. **Hem the Sweatshirt.** (optional) You can leave the bottom edge raw or make a single fold to the wrongside, press and topstitch.
10. **Complete Final Touches.** Use a hand sewing needle and thread to attach a snap button at the back to close. Position the vinyl design on the sweatshirt front, cover with a piece of parchment paper and use the heat press to apply.

