

# Boy Doll T-Shirt with Print



Bring a ragdoll to life with this fun and creative sewing project! Use the MOMENTO™ Craft Cutting Machine to cut the jacket for this cute doll.


## What you need

- SINGER® MOMENTO™ Craft Cutting Machine
- Jersey Knit Fabric
- Heat Transfer Vinyl
- Fabric Grip Mat 24" x 24"
- Standard Grip Mat 12" x 12"
- Rotary Blade
- Basic Blade
- Brayer
- Sewing Machine

- Stretch/ball Point Needle
- Thread
- Iron and Ironing Board
- Straight Pins
- Hand Sewing Needle
- Buttons
- Parchment Paper

## Directions

1. **Prepare the Fabric.** Place the fabric onto the mat. Use a Brayer to adhere the fabric to the mat, smoothing out any wrinkles or bubbles.
2. **Cut the Fabric.** Open the project in canvas. Insert the Rotary Blade into the right carriage of your cutting machine. Select the correct mat size, material type and material size, in the software. Follow the on-screen steps to cut the fabric.

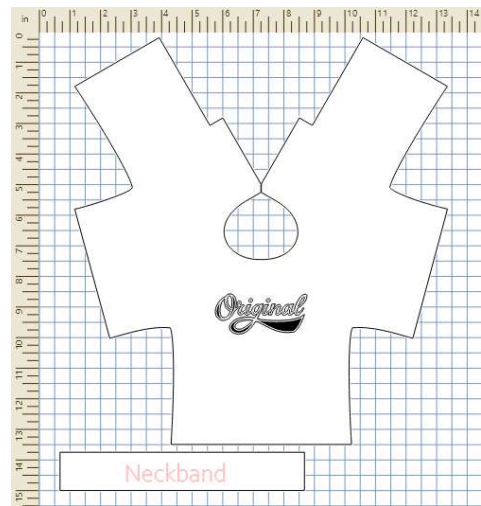


3. **Cut the Vinyl.** Place Heat Transfer Vinyl, shiny side down, on the Standard Grip Mat. Change to the Basic Blade and change the inputs for mat size, material type and material size. Follow the on-screen steps to cut the vinyl design. Weed the design and remove the negative bits.




### *Tips for Sewing in Jersey fabrics:*

- *Use a stretch or ballpoint needle with a rounded end (rather than a point). This helps push fibers to either side of the needle without creating holes in the fabric.*
- *Use a stitch like a narrow zig zag or stretch tricot stitch that will stretch with the fabric to prevent the thread from snapping.*
- *Unlike woven fabrics, knits don't fray, so finishing your seams is optional.*


4. **Hem the Sleeves.** Make a single fold to the wrong side and topstitch.

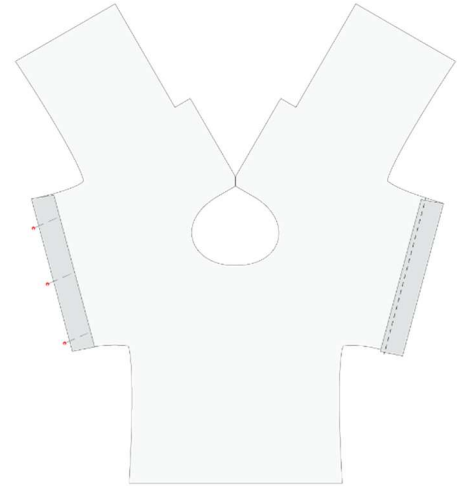

5. **Stitch Front to Back.** With right sides together, stitch underarm and side seams using a  $\frac{1}{4}$ " (6mm) seam allowance.

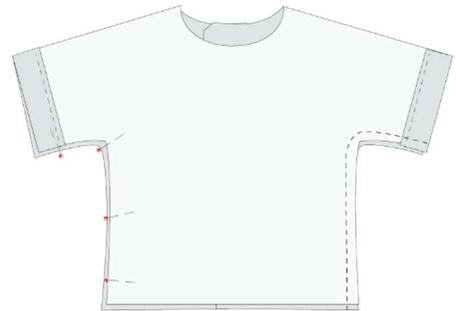

6. **Sew the Neck band.** Fold the neckband in half lengthwise, wrong sides together and press. Sew the neckband to the neck opening, aligning the raw edges. Stretch the neckband as you sew. Trim excess neckband.

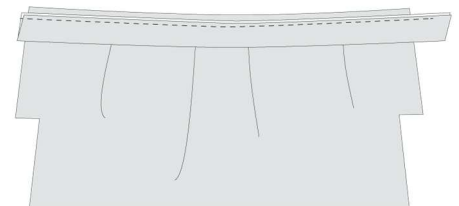

7. **Sew the Back Seam.** Place the back pieces right sides together. Sew the center back seam from the placket to the bottom edge. Fold the placket interfacing to the wrong side. Sew down on both sides.



8. **Hem the Shirt.** (optional) You can leave the bottom edge raw or make a single fold to the wrongside, press and topstitch.
9. **Complete Final Touches.** Use a hand sewing needle and thread to attach a snap button at the back to close. Position the vinyl design on the shirt front, cover with a piece of parchment paper and use the heat press to apply.

